


button. Janus displays include speakers as well as an integrated controller

sizes



1.2 mm COB

1.5 mm COB

1.56 mm COB

0.75 mm COB

0.78 mm

COB

classes













## connections

source connections

(2) HDMI, (1) 3.5mm, (2) USB3.0, (1) USB2.0, (1) RJ45

Wi-Fi modes

5G, 2.4G, Access Point

control

Remote control, touch panel

## specifications

maximum brightness

environmental rating

panel ratio

LED half-life\*

refresh rate

frame rate

color temperature

processing depth

temperatures

operating humidity

operating voltage

ip rating

service access

1,000 Nits

Indoor, mobile installation

16:9

100,000 hours

3,840 - 7,680 Hz

50, 60 Hz

2,000 - 12,000 K range

14 - 16 bit

-10°C - +40°C operating


10% - 80% RH, non-

condensing

100-240V AC, 50/60 Hz

**IP30** 

Front

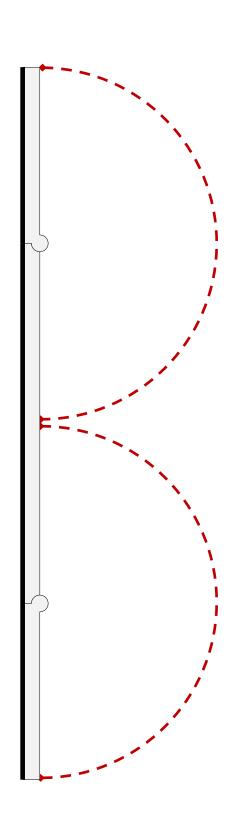




## Convenient push-button operation



## Small footprint for easy transport and storage

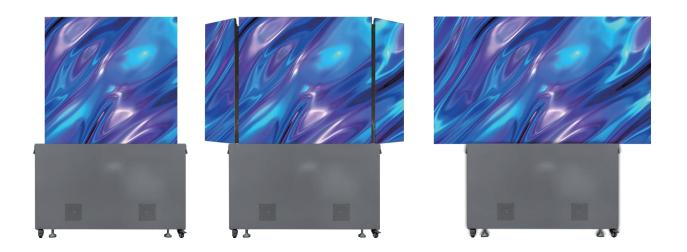



2K		4K	
model	110" FullHD 1.25mm pitch	model	130" UltraHD
display dimensions	2400mm (7.8ft) HEIGHT 1350mm (4.4ft)	display dimensions	width 2880mm (9.4ft) неіднт 1620mm (5.3ft)
storage dimensions	мютн 1650mm (5.4ft) 1760mm (5.8ft) рертн 520mm (1.7ft)	storage dimensions	мютн 2170mm (7.1ft) неіднт 2084mm (6.8ft) Бертн 520mm (1.7ft)
weight	470kg (1035lbs)	weight	520kg (1146lbs)
model	130" FullHD	model	136" UltraHD
display dimensions	2880mm (9.4ft) неізнт 1620mm (5.3ft)	display dimensions	width 3000mm (9.8ft) неіднт 1687.5mm (5.5ft)
storage dimensions	2170mm (7.1ft) 2084mm (6.8ft) 520mm (1.7ft)	storage dimensions	WIDTH 2050mm (6.7ft) HEIGHT 2150mm (7.0ft) DEPTH 520mm (1.7ft)
weight	520kg (1146lbs)	weight	550kg (1212lbs)
model	136" UltraHD		
display dimensions	мютн 3000mm (9.8ft) неібнт 1687.5mm (5.5ft)		
storage dimensions	width 2050mm (6.7ft) неіднт 2150mm (7.0ft) дертн 520mm (1.7ft)		
weight	550kg (1212lbs)		