

The Communicator



ideal for

Virtual presence

summary

The Communicator will allow a speaker to communicate via a live video presentation their full-body likeness, in real time, to co-workers, suppliers, or customers who have a similar unit at other locations."


aspect ratio gross weight

9:16 277 kg (610 lbs)

max brightness transparency

500 nits 75%

dimensions

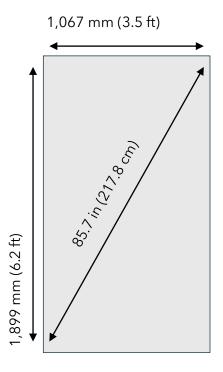



series name

The Communicator

maximum brightness 500 nits

environmental rating

Indoor, permanent installation

resolution

width 1,920 px

HEIGHT

1,080 px

panel ratio

16:9

display size

WIDTH

1,899 mm (6.2 ft)

HEIGHT

1,067 mm (3.5 ft)

colors

16.7 million

response time

8 milliseconds

transparency

75%

supported formats

MPEG4 (AVI, DIVX, XVID) MPEG2 (DVD, VOB, mpeg) MPEG1 (VCD, DAT, MPG)

MP3 JPG BMP GIF PNG

watts

700 W

operating voltage

100-240V AC, 50/60 Hz

ip rating

Indoor only

package box dimensions

WIDTH

2,260 mm (7.4 ft)

HEIGHT

1,430 mm (4.7 ft)

DEPTH

680 mm (2.2 ft)

gross weight

277 kg (610 lbs)

